



**NORTH AMERICAN  
FIRE HOSE  
CORPORATION**


The difference is... *your* margin of safety.

## Outback 600™

### Outback 600™ Features

- Poly-Cord™ ring spun polyester warp yarns are combined with filament polyester filler yarns
- Fabric construction features a very fine twill weave for improved abrasion and snagging resistance in wildland fire fighting situations
- High visibility Yellow Ultra-Shield™ polyurethane coating seals each and every fiber in the bundle, further improving abrasion resistance, reducing moisture and chemical absorption, and providing vivid color-coded identification
- The Dura-Thane™ polyurethane inner lining is extremely strong and durable, while maintaining a lightweight and compact profile
- Immune to the effects of mildew and rot, requiring less maintenance after use
- Designed to withstand the rigors of the “Outback”, as well as other wild land fire fighting situations
- Both the hose and couplings are Made in the USA

Applications: Forestry, Wildland, and CAFS

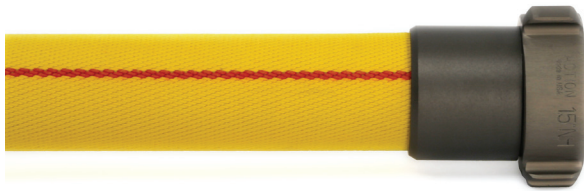

HOSE SIZE	SPECIFICATION NUMBER	ACCEPTANCE TEST PSI	SERVICE TEST PSI	BOWL SIZE	WEIGHT PER 100' UNCPLD
1"	OB-600	600 PSI	300 PSI	1¼"	10 lbs.
1½"	OB-600	600 PSI	300 PSI	1¾"	14 lbs.
1¾"	OB-600	600 PSI	300 PSI	1⅝"	20 lbs.

OB-600™, Outback 600™, Ultra-Shield™, Poly-Cord™ and Dura-Thane™ are trade marks of North American Fire Hose Corporation. All rights reserved.

Copyright © 2011 North American Fire Hose Corporation. All rights reserved.

Revision 2011A

**North American Fire Hose Corporation**

910 East Noble Way · Santa Maria, CA 93454

Phone 805 922-7076 · Fax 805 922-0086

[www.nafhc.com](http://www.nafhc.com)

