



# NORTH AMERICAN FIRE HOSE

The difference is...*your* margin of safety.

## NAFH-187™ Type II


Polyurethane (TPU) Lining / Polyester Single Jacket

### NAFH-187™ Type II FEATURES

- **Poly-Cord™** ring-spun polyester warp yarns are combined with filament polyester filler yarns.
- Fabric construction features a very fine twill weave for improved abrasion and snagging resistance in wild land fire fighting situations.
- High visibility yellow **Ultra-Shield™** polymeric coating seals each and every fiber in the bundle, further improving the abrasion resistance, reducing moisture and chemical absorption, and providing vivid color-coded identification.
- The **Dura-Thane™** polyurethane inner lining is extremely strong and durable, while maintaining a lightweight and compact profile.

- Immune to the effects of mildew and rot, requiring less maintenance after use.
- Meets all requirements of the U.S. Forest Service Standard 5100-187 for Type II construction.
- Both the hose and couplings are made in the USA.

**Applications: Forestry, Wildland and CAFS**  
**Available in 50 and 100 foot lengths**

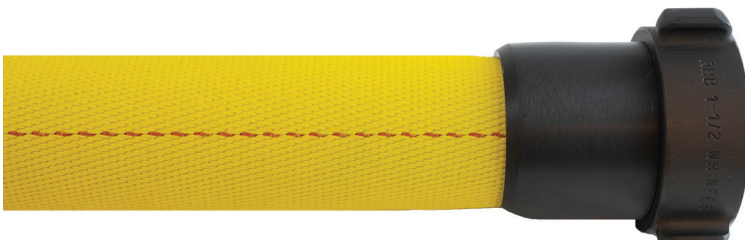

 **FAMILY OWNED  
AMERICAN MADE**

Hose will be marked "450 PSI Working Pressure" in accordance with USDA Forest Service Specification 5100-187 Type II

HOSE SIZE	SPECIFICATION NUMBER	BURST PRESSURE	WORKING PRESSURE	BOWL SIZE	WEIGHT PER 100' UNCLD
1"	NAFH-187 II	900 PSI	450 PSI	1 <sup>3</sup> / <sub>16</sub> "	10 lbs.
1 <sup>1</sup> / <sub>2</sub> "	NAFH-187 II	900 PSI	450 PSI	1 <sup>1</sup> / <sub>16</sub> "	14 lbs.

NAFH-187 Type II,™ Ultra Shield,™ Poly-Cord™ and Dura-Thane™ are all trademarks of North American Fire Hose Corporation. All rights reserved.

Revision 2023A

### NORTH AMERICAN FIRE HOSE

910 East Noble Way • Santa Maria, CA 93454

Tel: 805.922.7076 • Fax: 805.922.0086

NAFHC.com

